



Packet No. 348-035

Patent

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application

Nicholas Mark Alford et al.

Serial No. 10/601,974

Filed: June 23, 2003

For: **MAGNETIC SEPARATORS**

:
:
:
:
:
:
:
:

Group Art Unit:

Examiner:

LETTER

Commissioner of Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Dear Sir:

A claim for priority under 35 USC §119 was previously made with respect to Great Britain Application No. 0214593.6 filed June 25, 2002. A certified copy of that application is enclosed herewith to perfect the claim of priority.

Respectfully submitted,

KING & SCHICKLI, PLLC

Andrew D. Dorisio
Registration No. 41,713

247 North Broadway
Lexington, KY 40507-1058
(859) 252-0889

CERTIFICATE OF MAILING

I hereby certify that this correspondence
is being deposited with the United States Postal
Service as first class mail in an envelope
addressed to: Commissioner for Patents
P.O. Box 1450, Alexandria, VA 22313-1450 on

Date 9/30/03 September 30, 2003
[Signature]



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.




Signed

Dated

19 June 2003

Pat. Act 1977
(Rule 16,

25JUN02 E728354-1 D01552
P01/7700 0100-0214593.6

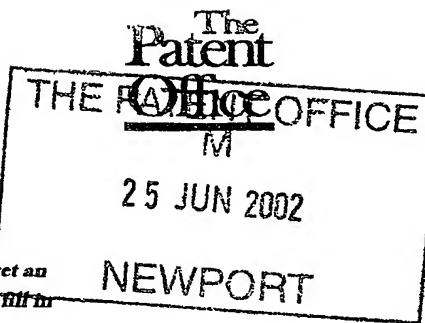

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

BKCD/NS/END.16

2. Patent application number

(The Patent Office will fill in this part)

0214593.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Cross Manufacturing Company (1938) Ltd.
Hopton Park
London Road
Devizes
SN10 2ET

8410417001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Magnetic Separators

5. Name of your agent (if you have one)

Wynne-Jones, Laine & James

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

22 Rodney Road
Cheltenham
GL50 1JJ

Patents ADP number (if you know it)

1792001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 6 ✓
Claim(s) 2 ✓ W
Abstract 0
Drawing(s) 3 + 3 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature
Wynne-Jones, Laine & James

Date

Wynne-Jones, Laine & James

24.06.02

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr B Dunlop

01242 515807

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
b) Write your answers in capital letters using black ink or you may type them.
c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
e) Once you have filled in the form you must remember to sign and date it.
f) For details of the fee and ways to pay please contact the Patent Office.

Magnetic Separators

This invention relates to magnetic separators.

5 Magnetic separators are used extensively in many industries to remove magnetic or magnetisable materials, e.g. ferrous contamination, from process materials.

For those process materials which are fluent, it is known to locate tubes across the material flow path and have, magnets located in the tubes so that the contaminant material is attracted to the surfaces of the tubes and retained there.

10 Periodically the flow of material is switched off and the magnets are withdrawn from the tubes allowing the contamination to be released from the walls of the tubes. Traditionally this withdrawal took place manually, but proposals have been made for powered systems using pneumatic rams to withdraw and insert the magnets either under manual control or under the control of some control

15 system. When withdrawn, the magnets do not perform any separator or filtering function and therefore the flow of material must cease prior to withdrawal. Further a hopper or the like must be disposed across the bottom of the separator so that the release material can fall into the hopper and be removed from the system. Particularly where gases or liquids are involved, significant sealing

20 difficulties can arise.

From one aspect the invention consists in a magnetic separator for separating magnetic or magnetisable material from a fluid flow path including one tube portion disposable in the flow path and a magnet in the tube portion movable between a separator position in the tube portion and a release position

25 in which the magnet is withdrawn from the tube portion characterised in that the magnet is in the form of a shuttle and in that the tube portion is part of a longer

tube disposable within the flow path whereby the magnet can be moved between its positions by differential pressure being created across the magnet.

Preferably the tube is generally aligned with the direction of flow, so that the release position is upstream of the separator position, but lateral tube
5 alignments may also be used.

It is particularly preferred there are a plurality of tubes, which can be arranged within an array within the flow path, in which case there is a magnetic shuttle in each tube. The number of tube portions required depends on the size of the flow cross section, the rate of flow and the strength of the magnet.

10 Conveniently the magnetic shuttle includes a linear array of magnets and seals at either end of the array for sealing within the inner face of the tube. The shuttle or shuttles can then be moved along the tube by means of differential fluid pressure extending across the shuttle. Most conveniently each tube has a valve at either end for allowing the introduction of compressed air so that the
15 shuttle can be moved in the desired direction, although the fluid itself could be used as a power source, as could vacuum sources.

The apparatus may further include a baffle encircling the tube or tubes at a location between the positions. The provision of such a plate enhances the retention of separated material adjacent the separator location, when the shuttle,
20 or shuttles, is moved to its release position. The separator may include an outlet valve for directing the fluid in the first direction when the shuttle is in its separator position and in a second direction when the shuttle is not in its separator position. In this way the fluid can be used to flush out the separated material into a reservoir from where the separator material can be collected by settling,
25 further magnetic separation or other techniques. Alternatively non-system fluid can be used for flushing. This is preferred if the system pressure is low and/or

the nature of the system fluid is such that it is preferably retained in the system e.g. it is too hot, radioactive, corrosive etc.

It will be understood that as the release position is contained within the flow path, the shuttle, or shuttles, continue to separate out contaminant material.

5 This means that the outlet valve can safely be switched to the first or normal position before or as the shuttles are moved into the separator position and therefore there is very little dead time involved. Further, because the fluid flow is used to flush out the separator material, there is very little chance of downstream contamination occurring.

10 Conveniently the tube or tubes are disposed in a chamber which is divided by the baffle plate with, as has already been indicated, the release position upstream of the baffle and the separator position downstream of the baffle.

15 From another aspect the invention consists in a magnetic separator for separating magnetisable or magnetic material from fluid flow flowing along a flow path including a magnet movable between a separator position and a release position characterised in that the release position also lies within the flow path.

20 Although the invention has been defined above it is to be understood it includes any inventive combination of the features set out above or in the following description.

The invention can be performed in various ways and specific embodiments will now be described by way of example, in which:

Figure 1 is a partially cut-away perspective view of a magnetic separator;

25 Figure 2 is a side view of a magnetic shuttle for use with the apparatus of Figure 1; and

Figure 3 is a perspective view of an alternative separator with lateral tubes.

A magnetic separator generally indicated at 10 includes a chamber 11 having inlets and outlets 12, 13 which together define a flow path 14. The cylindrical chamber 11 has axially extending tubes 15 disposed in an array around its cross-section and is divided into top and bottom compartments 16, 17 by a perforate baffle plate 18, through which the tubes 15 extend. Each tube contains a magnetic shuttle 19, which will be described in more detail below. The shuttles 19 are a friction fit within their respective tube 15 so that they can take any vertical position into which they are moved.

Pneumatic inlets 20 are located at each end of each tube 15 so that compressed air can be blown into the tube, from one end or the other to move the shuttles 19 from the release position shown in Figure 1, in compartment 16, to a separator position, where the shuttle lies within compartment 17.

A two-way outlet valve 21 is attached to the outlet 13. In normal use the outlet valve 21 directs flow in the process direction 22, but in its second position it directs flow in direction 23, where it passes into a settling tank, sump or other reservoir.

Turning to Figure 2, each shuttle 19 comprises annular magnets 24, which are threaded, with a clearance fit, onto a rod 25 with intervening pole pieces 26. The magnets are arranged so that unlike poles are adjacent to each other. At the end of the linear array of magnets and pole pieces 24, 26 are non-magnetic retaining discs 27 that are grooved to receive a sealing O-ring 28. Lock nuts 29 retain the array on the rod 25. As has been indicated the shuttles 19 are a sufficient friction fit within their respective tubes 15 to take whatever position they are moved into.

In normal use, the shuttles 19 are disposed in their separator position at the downstream end of the tubes 15 within the compartment 17. Fluid flows down the flow path 14 and out through the outlet valve 21 in the direction 22. As the fluid passes along the tubes 15 within the lower compartment 17, any magnetic or magnetisable material is attracted to and retained on the side walls 16 by the strong magnets 24, which, as has been mentioned above, are typically made of Neodymium Iron Boron. At intervals, which can be predetermined or determined by inspection or other monitoring (e.g. flow rate), the outlet valve 21 is switched so that the flow goes in the direction 23 and compressed air drives the shuttles up into the illustrated release position within compartment 16. The material which is attached to the tubes 15 will then be washed away into the reservoir or sump by the flow of process liquid. Tube guides 30 surrounding the tube at the baffle plate 18, will help to wipe off any material which will tend to be dragged up by the moving shuttle 19. After a predetermined period, which can be short as the contaminate is actually washed out of the lower compartment 17, the outlet valve is returned to its original position and the shuttles 19 are driven back into the separator position. As the shuttles 19 always lie within the flow path, they will at all times be capturing contaminate, therefore the relative timing of the switching of the outlet valve 21 becomes much less critical and there is no need for a certain dead time whilst the magnets are restored to their separator position, as occurs with the prior art apparatus. Any material which is captured in the upper compartment, whilst the shuttles 19 are in their release position, will equally be released as the shuttles 19 move down into the lower compartment. This released material will then be washed into the lower compartment and re-captured.

The separator has been described and illustrated in a vertical orientation. It will be appreciated that this is the preferred arrangement, because the

released material will tend to fall away, in the desired direction, under gravity as well as under the influence of the process liquid. However, it will be understood that, because the process liquid is available to wash away the released material, the separator can, unusually, be used in other orientations and, to enhance this washing away process, it is possible for the pressure of the process liquid to be increased during the washing away or release phase.

Figure 3 includes two variations which can be incorporated either together or separately. First the tubes 15 are laterally arranged, in the manner of a spiral staircase, so that the release positions are external to the chamber. Secondly a further direction valve 21a is provided, this time at the inlet end, to allow separate flushing for the reasons set out above. Further if the valve 21a is switched first to atmosphere and the chamber 11 drained, then collected material can be blown out of the chamber 11, by compressed air, which is fed to valve 21a, through valve 21 in its second position, and can be collected in a bag or the like without the need for secondary separation.

CLAIMS

1. A magnetic separator for separating magnetic material from a fluid flow flowing in a flow path including one tube portion disposable in the flow path and a magnet within the tube portion movable between a separator position in the tube portion and a release position in which the magnet is withdrawn from the tube portion characterised in that the magnet is in the form of a shuttle and in that the tube portion is part of a longer tube disposable within the flow path whereby the magnet can be moved between its positions by differential pressure being created across the magnet.

2. A separator as claimed in Claim 1 wherein there are a plurality of tubes and a magnet shuttle in each tube.

3. A separator as claimed in Claim 1 or Claim 2 wherein the or each magnet shuttle includes linear array of magnets and seals at either end array for sealing with the inner face of a tube.


4. A separator as claimed in any one of the preceding claims further including control apparatus for supplying compressed air to the tube to move the shuttle, or shuttles, between its positions.

5. A separator as claimed in any one of the preceding claims further including a baffle encircling the tube or tubes at a location between the positions.

6. A separator as claimed in any one of the preceding claims further including an outlet valve for directing the fluid in a first direction when the

shuttle is in its separator position and in a second direction when the shuttle is not in its separator position.

- 5
7. A separator as claimed in any one of the preceding claims wherein the tube, or tubes, is disposed in a chamber divided by a baffle plate through which the tubes extend and release position lies upstream of the baffle, whilst the separator position lies downstream of the baffle.
- 10
8. A magnetic separator for separating magnetisable material from a fluid flow flowing along a new path, a magnet movable between a separator position and a release position characterised in that the release position lies also within the flow path.
- 15
9. A separator as claimed in Claim 8 having the features of any one of Claims 1 to 7.
- 20

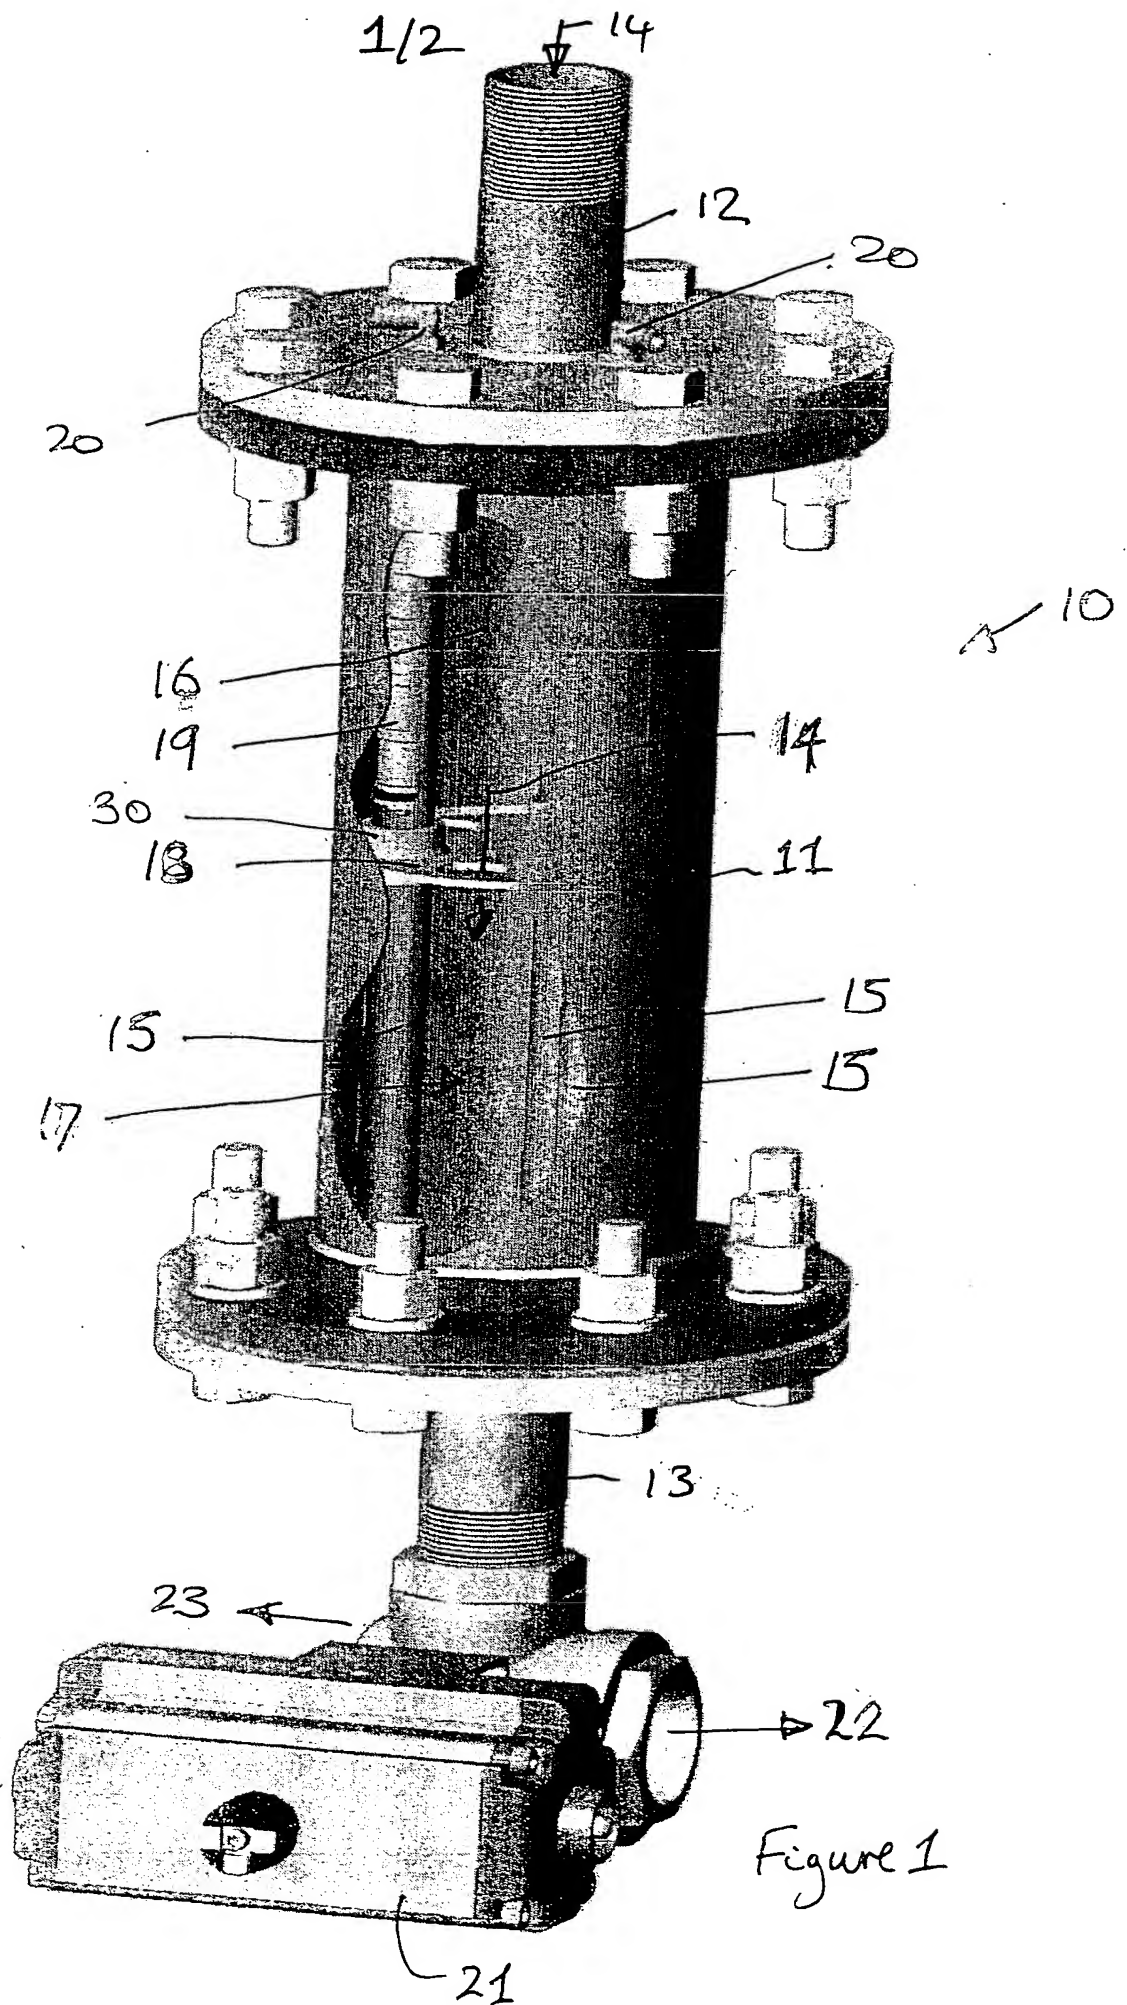

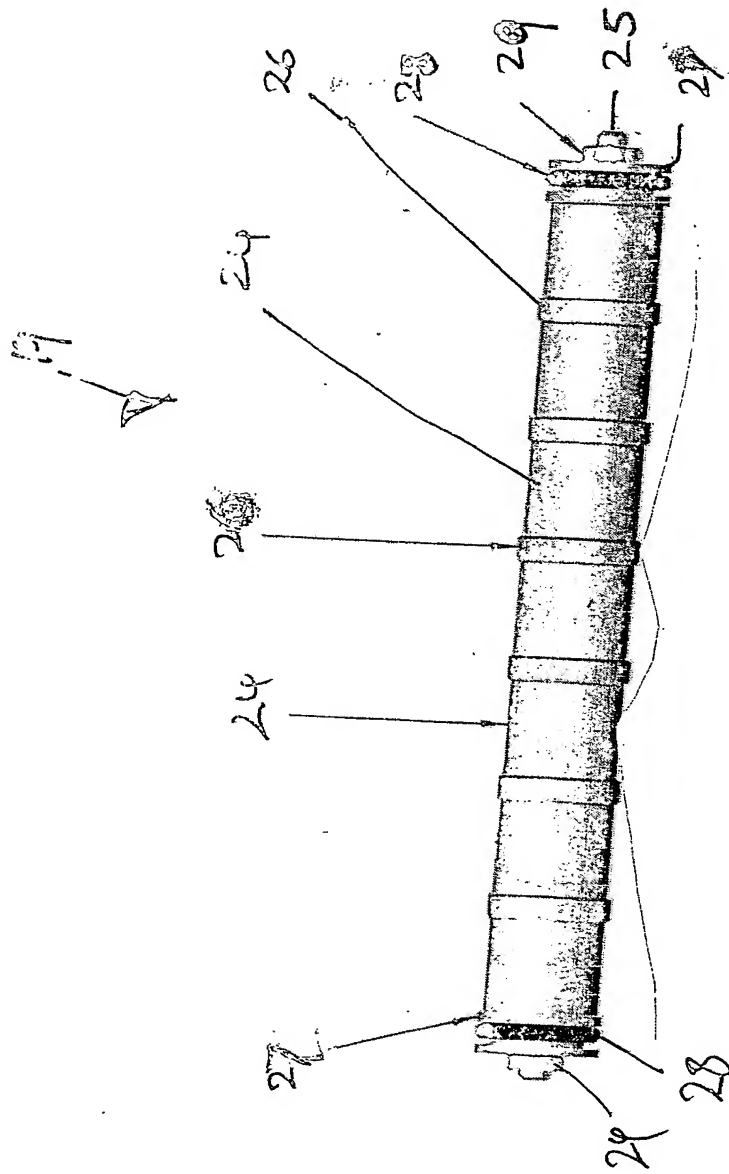


Figure 2.

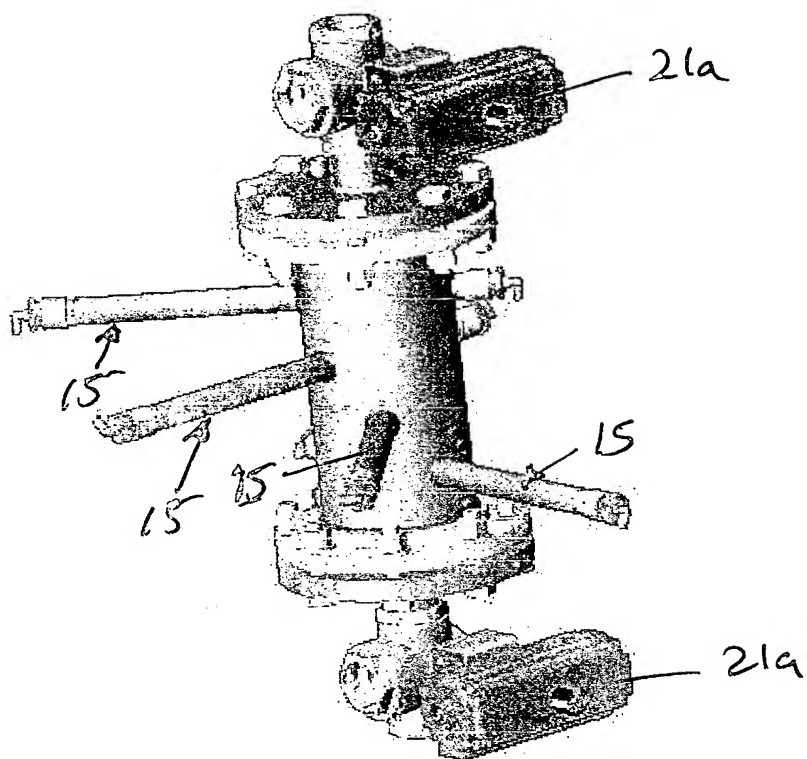


Figure 3

